

**PREVIEW**

**KODEN**

**2008**  
**New Echo Sounder**

**Digital Echo Sounder**



5.7-inch Color LCD Echo Sounder

**CVS-126**

## FEATURES

### “SONA-TONE”

- ▶ Exclusive audio sonar tones identify what is under your boat with different sounds for fish, seafloor, etc.


### “Back to hot-spot” support

- ▶ With input from external GPS sensor, it can lead you back to your favorite fishing hot spots or other previously saved positions in memory.
- ▶ Powerful 600W with dual-frequency 50/200 kHz operation, for both shallow and deep water fishing.
- ▶ Clear and realistic visual impressions offered by low noise high resolution Digital signal receiver.
- ▶ Brilliant, sunlight viewable 5.7" color LCD display with anti-reflective glare coating.
- ▶ Clear definition and easy to differentiate between baitfish, larger fish, fish schools and sea floor with up to 64 color echo levels.
- ▶ Up to 10 screen images can be stored in built-in memory. You can recall a potential hot spot for review later.
- ▶ Sleek, new compact case design can be mounted almost anywhere.
- ▶ Built-in flush mounting system makes installation easy, as you can mount screws from front side.
- ▶ Environmentally friendly. 20% less in power consumption compared to conventional models of similar size.

## EQUIPMENT LIST

Standard equipment	Display unit with hard cover, Mounting bracket	1 set
	DC power cable, Installation material, Spare parts, Accessories and Operation manual	1 set
Essential option	Transducer	
Options	Temp. & speed sensor, Connection cables for external devices, In-hullkit, Junction box and Power rectifier, AC Power cable	

## DIMENSIONS

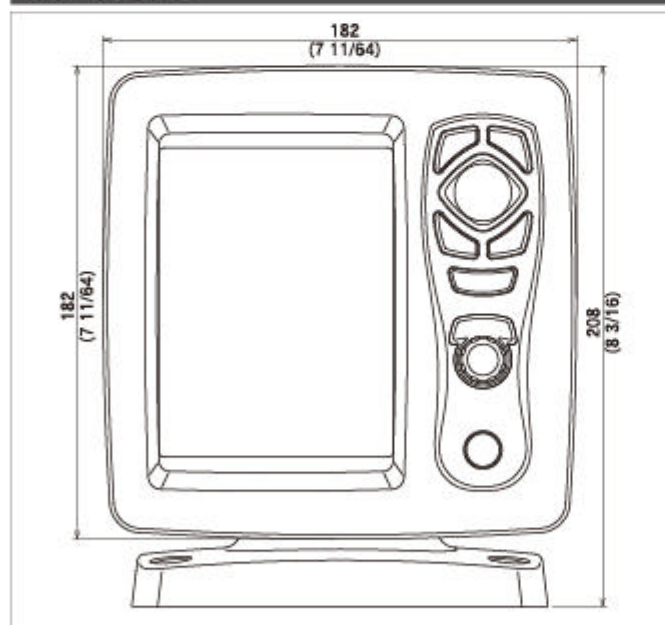

## SPECIFICATIONS

Model	CVS-126
Output power (RMS)	600 W
Display	5.7 inch color TFT LCD (240 x 320 pixels)
Display colors	64 colors / 16 colors / 8 colors + back ground color (blue, dark blue, black, white, Nighttime color, other 4 colors)
Frequency	Dual 50/200 kHz
Depth ranges	0 to 800 (Meter / Fathom / Italian Fathom), Choice of 8 ranges from 60 to 2900 (Feet), Choice of 8 ranges from 60
Zoom ranges	2.5 to 200 (Meter / Fathom / Italian Fathom) 26 steps 10 to 650 (Feet) 26 steps
Image shift	Auto or Manual
Presentation modes	0 to 300 (Meter / Fathoms / Italian Fathom) or 0 to 1000 (Feet) High frequency, Low frequency, Zoom image (Bottom lock, Bottom discrimination, Bottom zoom, Zoom, Sea bottom partial zoom) A-scope display can be added to all above modes Left and right divided
Auto functions	Depth range, Shift and Gain
Other functions	Bottom / Fish alarm, Image speed, Interference rejection, Color rejection, Depth marker (VRM), Event memory, Panel illumination, Draft adjustment, Temperature correct, Boat speed correct, White line, Sonar tone, Display memory, Waypoint navigation, Power reduction
Power supply	10.8 to 31.2 VDC
Power consumption	12W or less (at 24VDC)
Water protection	IPX5
Operating temperature	-15°C to +55°C

• Design and specifications are subject to change without notice.

**KODEN** Kodens Electronics Co., Ltd.

Tamagawa Office:  
2-13-24 Tamagawa, Ota-ku, Tokyo, 146-0095 Japan  
Tel: +81-3-3756-6501 Fax: +81-3-3756-6509  
Uenohara Office:  
5278 Uenohara, Uenohara-shi, Yamanashi, 409-0112 Japan  
Tel: +81-554-20-5860 Fax: +81-554-20-5875

overseas@koden-electronics.co.jp

www.koden-electronics.co.jp



**Safety precaution**

To ensure proper and safe use of the equipment, please carefully read and follow the instructions in the Operation Manual.

For details, please contact: